


Your distributor




Route du stade • 23600 BOUSSAC • France  
Tél. +33 (0) 555 82 40 00 • Fax +33 (0) 555 65 18 54  
[www.dagard.com](http://www.dagard.com) • e-mail : [info@dagard.com](mailto:info@dagard.com)



05 55 52 34 64 • non contactual pictures-Dagard reserves the right to modify its products without notice.

CHAMBRES FROIDES COMMUNICATIONS





# Walk-in Coldrooms



Insulate to protect



DAGARD'S COMMUNICATIONS 03 33 34 04 • non contactat pictures-dagard reserves the right to modify its products without notice.



# Modular insulation

## *core of coolness*

**Food product preservation by cooling involves irreproachable conditions of hygiene and insulation.**


**Dagard's great experience and high standards has enabled the design of high quality cold storage facilities for its customers.**

**Designed by professionals for professionals, there are solutions for all requirements.**

With its major concern for respecting the environment and in compliance with the Kyoto convention, Dagard has eliminated HCFC substitutes from manufacturing processes of its panels and thus plays its part in the

protection of the ozone layer.

All customers will find the solution they seek from our lines: system for coupling or partitioning, below or above freezing, with refrigerating unit, floor, etc.

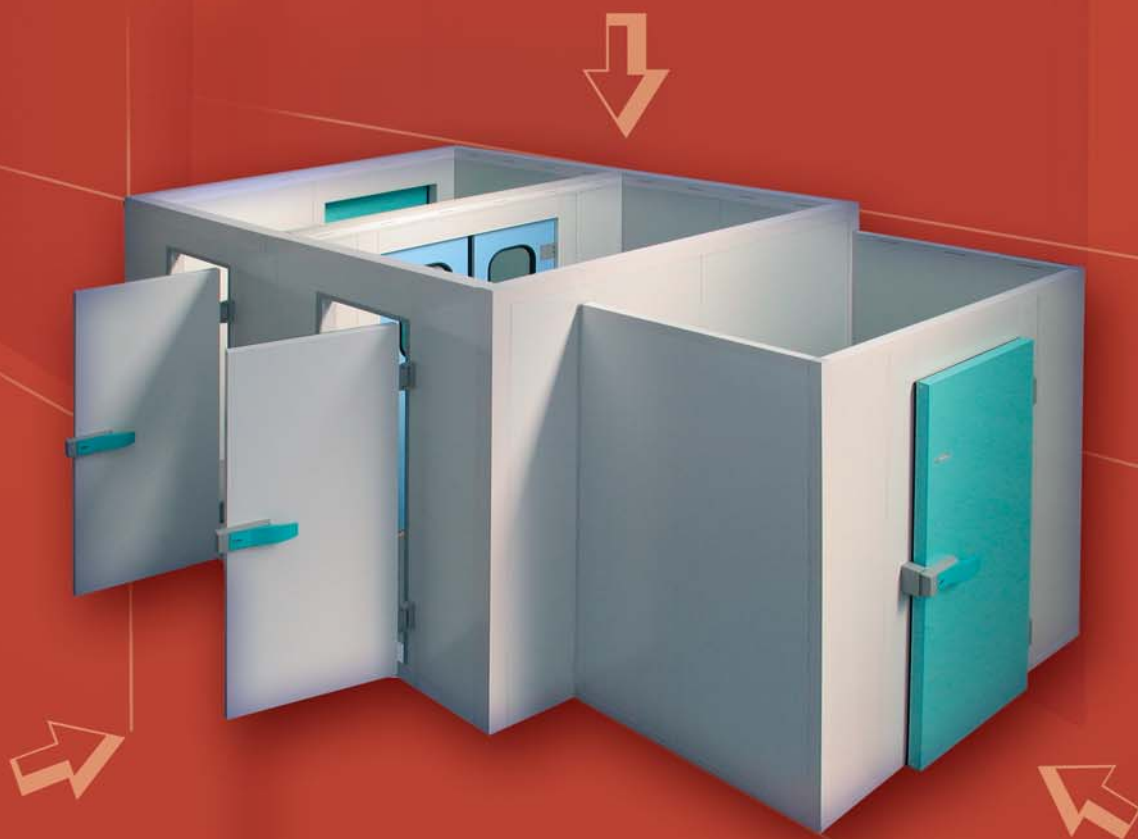


Bloc 3000 ■

Easy Bloc ■

Taïga ■

Europa ■

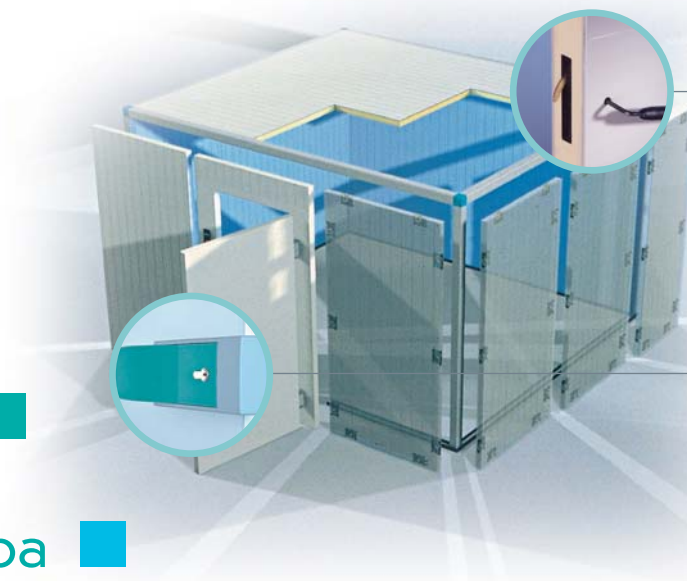

**Assembly system**  
Panels are fitted with camlocks ensuring stability and tightness of the unit while enabling quick assembly and disassembly.

**Handle**  
On hinged doors, an ergonomically designed handle enables door to be opened with arms full.

# Design heritage

## 1 / CHARACTERISTICS

	modular	for partitioning	for coupling	2 thicknesses 60 and 100 mm	3 thicknesses 60-100 and 150 mm	with floor	without floor
BLOC 3000	✓			✓		✓	✓
EASY BLOC	✓			✓		✓	
TAÏGA	✓	✓		✓		✓	✓
EUROPA	✓	✓	✓		✓	✓	✓


## 2 / WALL PARTITIONS

White, pre-lacquered, smooth or corrugated metal plate 40 cm-module panels, thickness 5/10<sup>th</sup> or 6/10<sup>th</sup>, to food industry quality standards, Polyurethane foam high density, HCFC free.

## 3 / FLOOR

- floor 30: 6/10<sup>th</sup> steel plate coated with a grey PVC film and glued to plywood base.
- floor 40: 6/10<sup>th</sup> embossed stainless steel glued to CTBX plywood reinforced with steel plate.

Panel load on floor	Load evenly distributed	Concentrated static load	Dynamic load on carriage with 4 rubber coated wheels
floor 30	3 000 kg/m <sup>2</sup>	400 kg/60cm <sup>2</sup>	500 kg/m <sup>2</sup>
floor 40	4 000 kg/m <sup>2</sup>	500 kg/60cm <sup>2</sup>	800 kg/m <sup>2</sup>



Floor panels 60 mm thick - 100 or 150 mm

## 4 / DOORS


	hinged	sliding	flush	swinging	strip curtain
BLOC 3000	✓				
EASY BLOC	✓				
TAÏGA	✓	✓	✓	✓	✓
EUROPA	✓	✓	✓	✓	✓

Standards colour: white - other colours as per colour card.



## 5 / INTERNAL FURNITURES

- 4-tiers shelving, depth 36 or 46 cm, uprights in duralinox anodized, removable polyethylene refrigerator shelves, to NF food industry hygiene standards.
- hooks bars stainless steel or galvanized steel height 215 cm.





# Bloc 3000 cell

*when simplicity means efficiency*

The Bloc 3000 cell perfectly complies with the most stringent conditions for the preservation of foodstuffs. Its dimensions and shape enable excellent integration into locations which are cramped or difficult of access.

### Thicknesses :

- 60 mm for temperatures above zero
- 100 mm for temperatures above zero and below zero down to -25°C

### Inside dimensions :


- width x depth: 123 x 123 cm to 243 x 243 cm
- height: 185.5 cm.

### Hinged door :

- frame width 120 cm, offset enabling shelving to be fitted on 3 sides
- clear opening 185.5 x 70 cm
- reversible for enclosures with floor
- hinge with switch

### Advantages :

- ideal for cramped locations
- easy cleaning
- quick installation
- economical

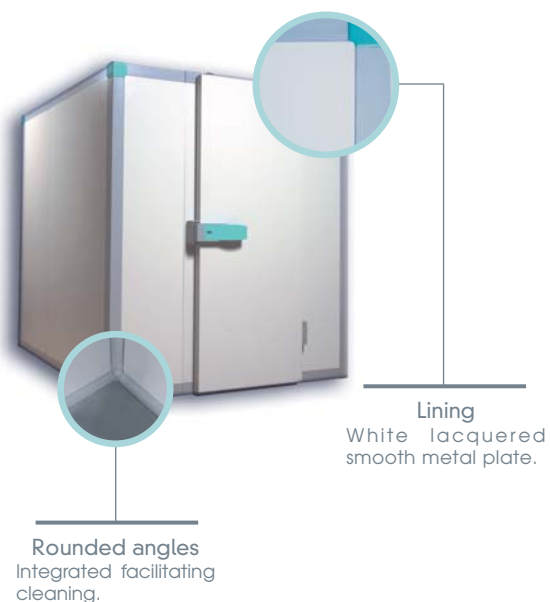



# Easy Bloc cell

*all in one*

Easy Bloc units came about from the perfect match between the Bloc 3000 line and hi-tech freezing equipment. Setting up the cell and its freezing unit is simple thus ensuring rapid commissioning.

### Thicknesses :

- 60 mm for temperatures above zero
- 100 mm for temperatures above zero and below zero down to -25°C

### Inside dimensions :

- width x depth: 123 x 123 cm to 243 x 243 cm
- height: 185.5 cm

### Hinged door :

- frame width 120 cm, offset enabling shelving to be fitted on 3 sides
- clear opening 185.5 x 70 cm
- reversible to meet layout requirements

### Freezing unit support panel :

- Freezing unit is mounted on a special-purpose panel: fixing lugs, holes drilled for the discharge of condensation and valve operating below zero

Type freezing unit	Refrigerating capacity (ext. t° 35°C)	Electrical energy absorbed
positive + 2°C	1 kW	600W
négative -18°C	1 kW	900W
négative -25°C (on 100 mm thick enclosure)	1,4 kW	1500W

### Shelving :

Every enclosure has its own shelving kit enabling enhanced storage space.

### Advantages :

- compact, silent and efficient
- simplified installation
- fast commissioning
- optimized storage space





# Taïga coldroom

## *total hygiene assurance*

All environmental, operating and installation constraints were taken into account in the design of the Taïga coldroom line. Its rounded wall, ceiling and floor angles are pleasant on the eye while meeting the strictest sanitation standards by facilitating cleaning.

### Thicknesses :

- 60 mm for temperatures above zero
- 100 mm for temperatures above zero and below zero down to -25°C

### Inside dimensions :

- width x depth: from 83 x 83 to 403 x 603 by multiples of 40 cm
  - 3 heights: 203 -223-243 cm
- Please contact us for dimensions greater than these.

### Doors :

- isothermal hinged and sliding
- Swinging and flush on inside partitions

### Accessories :

Shelving, racks with meat hook bars, access ramps safety bumper rails, strip curtains ...

### Advantages :

- open-ended
- attractive
- can be used for partitions
- quick installation



**U-shaped skirt**  
Secured to floor by U-shaped plinth for enclosures without floor. Quickly assembled, maximum impermeability.

**Corners and angles**  
in the same colours as the enclosure.



# Europa coldroom

*open-ended to match your project's progress*

The Europa room can be partitioned or its panels coupled in varying thicknesses and heights to form layouts from the most simple to the most complex. It is highly suitable for small businesses and industry whatever the specific needs and fits in with your special development requirements.

### Thicknesses :

- 60 mm for temperatures above zero
- 100 mm for temperatures above zero and below zero down to -25°C
- 150 mm for the storage of frozen and deep frozen products down to -40°C

### Inside dimensions :

- width x depth: by multiples of 40 cm from 80 x 80
  - 3 heights 201,5 -221,5 -241,5 cm
- Please contact us for dimensions greater than these.

### Doors :

- Isothermal hinged and sliding
- Swinging and flush on inside partitions

### Accessories :

Shelving, access ramps, safety bumper rails, strip curtains

### Advantages :

- modular
- can be coupled
- can be partitioned
- open-ended



**Stainless steel floor**  
Recommended for enclosures where traffic is dense and loads are heavy.

**Finishes**  
Skirts, angle fillets and safety rails provide a final finishing touch and facilitate cleaning.